



Australian Government

REC'D 02 JUN 2004

WIPO

PCT

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patent Office  
Canberra

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND  
SALES hereby certify that annexed is a true copy of the Provisional specification  
in connection with Application No. 2003901208 for a patent by OUTOKUMPU  
OYJ as filed on 17 March 2003.



WITNESS my hand this  
Twenty-fifth day of May 2004

*J. Billingsley*

JULIE BILLINGSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

**AUSTRALIA**

**PATENTS ACT 1990**

**PROVISIONAL SPECIFICATION**

***FOR THE INVENTION ENTITLED:-***

**"A FLOTATION DEVICE"**

**The invention is described in the following statement:-**

TITLE: A FLOTATION DEVICE

FIELD OF THE INVENTION

The present invention relates to flotation devices of the type used in mineral separation and will be described hereinafter with reference to this application. However,  
5 it will be appreciated that the invention is not limited to this particular field of use.

BACKGROUND OF THE INVENTION

The following discussion of the prior art is intended to place the invention in an appropriate technical context and to allow its benefits to be fully appreciated. Any statements about the prior art should not, however, be considered as admissions that  
10 such prior art is widely known or forms part of common general knowledge in the field.

Conventional flotation devices typically include a tank for receiving and containing slurry from a grinding mill, cyclone separator, or the like. An agitator, comprising a rotor housed within a stator, is normally disposed within the tank, and activated via a motor and drive shaft to agitate the slurry. An aeration system is also  
15 provided to direct air under pressure into the agitator through a central conduit formed within the drive shaft. Suitable reagents are also added, which coat the surfaces of the mineral particles within the slurry to make the particles hydrophobic and thereby to preferentially promote bubble to particle attachment. As bubbles dispersed by the rotor rise toward the surface of the tank, they carry with them floatable valuable mineral  
20 particles, which form a mineral enriched surface froth. The froth then migrates over a lip and into a launder whereby the valuable mineral particles suspended in the froth are recovered from the tank as a mineral concentrate. The gangue particles remaining suspended in the slurry, along with those mineral particles that were not removed by flotation, are continuously discharged from the tank through a bottom outlet. The  
25 bottom outlet often incorporates a dart or pinch valve, which is opened to allow the remaining slurry to progress under gravity feed to downstream treatment processes. It is normal practice to control the pulp level in each device using a PID controller, a level indicating probe and a control valve in the form of a dart, pinch or other suitable type of valve.

30 The slurry that is transferred through the bottom outlet includes both relatively coarse or dense particles as well as a large number of relatively fine particles, including

gangue slimes such as clay minerals, not removed by flotation. The slimes consist of very fine particles and accordingly have a total surface area much greater than that of the coarse particles. Accordingly, when a flotation reagent is added to the outflow from the tank, the majority tends to be absorbed by the slimes, which are not floatable, making  
5 the flotation process non-selective. Consequently, most of the coarser valuable particles do not receive sufficient flotation reagent to make them hydrophobic, even given extended conditioning times.

The flotation process can be made more efficient where coarse and fine particles are treated separately and in the past, devices such as hydrocyclones and hydrosizers  
10 have been used to separate a flotation feed stream into two discrete streams for separate processing. However, the capital cost of this equipment is high, making the prior art methods uneconomical for all but the most valuable ore bodies.

It is an object of the present invention to overcome or substantially ameliorate one or more disadvantages of the prior art, or at least to provide a useful alternative.

## 15 SUMMARY OF THE INVENTION

Accordingly, a first aspect of the present invention provides a flotation device including:

a tank to contain slurry incorporating fine and coarse particles containing minerals to be extracted;

20 a feed inlet for admission of slurry into the tank;

agitation means to agitate the slurry within the tank;

aeration means to aerate the slurry within the tank, whereby floatable minerals in suspension float upwardly to form a surface froth for removal via an overflow launder;

a bottom outlet for withdrawal of relatively coarse or dense components of the  
25 slurry from the tank, the bottom outlet directing the relatively coarse or dense components of the slurry into a downstream tank; and

a side outlet for withdrawal of relatively fine or lower density components of the slurry from the tank.

Preferably, the side outlet is adapted to remove slurry containing a relatively high  
30 proportion of gangue slimes from the top half of the tank, between a mixing zone of the rotor and a froth zone near the tank surface. More preferably, the side outlet is adapted to remove slurry from the top third of the tank.

Preferably, the side outlet includes a fluid conduit extending inwardly from the tank sidewall. In one embodiment, the conduit terminates near the centre of the tank, generally proximal a vertical axis of the tank.

In one embodiment, the side outlet directs the lower density components to a  
5 separate slurry processing unit configured for optimal treatment of relatively fine particles.

Preferably, the flotation device includes a top substantially hollow deflection cone fixed with respect to the tank and extending generally around the drive shaft. More preferably, the fluid conduit extends through a sidewall of the cone to facilitate fluid  
10 transfer from within the top cone, to the side outlet.

Preferably, the flotation device additionally includes a bottom substantially hollow deflection cone, also extending generally around the drive shaft, at a position below the top cone. More preferably, the bottom cone is axially movable relative to the drive shaft to allow the area of an annular opening between the cones to be adjusted. Preferably, in  
15 one selected configuration, the lower end of the top cone is nested at least partially within the upper end of the bottom cone.

Preferably, the top cone is truncated and includes an opening at its lowermost end. Preferably also, the lowermost end of the bottom cone fits relatively closely around the drive shaft, substantially to prohibit slurry flow through a region between the lowermost  
20 end of the bottom cone and the drive shaft.

Preferably, the agitation means includes a rotor supported for rotation within a surrounding stator, and operable by means of a central drive shaft extending downwardly into the tank.

The aeration means preferably includes an air blower and a fluid conduit for  
25 directing air from the blower into the agitator. The conduit preferably includes an axial bore extending through the drive shaft of the rotor.

The tank is preferably right cylindrical and the bottom outlet is defined by an opening in the lower half of the tank. Preferably, the opening is in the tank sidewall adjacent the tank floor. Alternatively, the bottom outlet is in the tank floor adjacent the  
30 tank sidewall. In another embodiment, a lower portion of the tank is conical in shape such that the relatively dense and coarse components of the slurry are directed toward the bottom outlet upon settling from solution or suspension.

Preferably, the device includes a plurality of tanks, each having an inlet connected to the outlet of its adjacent upstream tank. In one embodiment, all of the tanks are substantially identical, with each tank including a side outlet for withdrawal of relatively lower density components of the slurry from the tank. Preferably, each side outlet  
5 directs the lower density components to a separate slurry processing unit configured for optimal treatment of relatively fine particles. Alternatively, only the third and subsequent tanks in the series include a side outlet.

Preferably, the plurality of tanks is arranged in pairs. More preferably, the level of the base of each successive tank pair is lower than the base of its adjacent upstream pair,  
10 such that slurry flows under the influence of gravity from one tank pair to the next. Alternatively, the tanks are arranged in groups of more than two, wherein the level of the base of each successive tank group is lower than the base of the adjacent upstream group, such that slurry flows under the influence of gravity from one tank group to the next.

15 Preferably, the outlet from one tank pair to the adjacent downstream tank pair includes a valve to allow discharge of the relatively coarse or dense components of the slurry. More preferably, the valve is a dart valve, which may be positioned substantially within the tank adjacent the outlet, or in a conduit extending between adjoining tanks.

In the preferred embodiment of the invention, mineralised froth migrating across  
20 the overflow lip is collected in an overflow launder for recovery and further concentration.

A second aspect of the invention provides a method of separate size flotation in a flotation device, the method including the steps of:

25 providing a tank to contain slurry incorporating minerals to be extracted;  
directing feed slurry into the tank;  
agitating the slurry within the tank;  
aerating the slurry whereby floatable minerals in suspension form a surface froth;  
removing the froth via a launder system;  
separately withdrawing relatively coarse or dense and relatively fine or lower  
30 density components of the slurry from the tank for separate downstream treatment.

Preferably, after withdrawal from the tank, the relatively fine or lower density components are directed into one or more downstream fine particle flotation tanks

specifically configured for optimal recovery of relatively fine particles. Alternatively, where the fine particles are predominantly gangue slimes, they may simply be discarded.

Preferably, after withdrawal from the tank, the relatively coarse or dense components are directed into a separate series of one or more downstream coarse  
5 particle flotation tanks. More preferably, the above process is repeated in the downstream tanks.

Preferably, the method includes the step of adding a flotation reagent to the slurry in the downstream tanks.

Preferably, the method includes the step of adequately diluting the slurry in the  
10 downstream tanks.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a diagrammatic cross-sectional side elevation showing a flotation  
15 device according to the invention;

Figure 2 is a schematic view showing a network of the flotation devices; and  
Figure 3 is a schematic view of an alternative network arrangement.

#### PREFERRED EMBODIMENTS OF THE INVENTION

The flotation device is adapted for use in extracting valuable minerals from the  
20 cyclone overflow from a grinding circuit. This overflow is in the form of a slurry and typically includes mineral particles having a P80 of between around 50µm to around 220µm. However, the slurry also contains gangue slimes, which contain few recoverable valuable minerals, but which tend to absorb a high proportion of flotation reagents that are added to the slurry to facilitate recovery of the valuable minerals. It is  
25 emphasised that the illustrated flotation device differs from other flotation devices, such as flash flotation cells or "Skim Air" cells, which are typically located upstream in the grinding mill circuit and are used to process slurries containing much coarser particles.

Referring to the drawings, the invention provides a flotation device including a  
30 tank 1 containing a slurry incorporating minerals to be extracted. The tank includes a generally flat base 2 and a generally cylindrical sidewall 3 extending upwardly from the base. A peripheral overflow launder 4 extends around the inside top of the sidewall for removing mineral enriched froth as it floats to the surface.

An agitator is disposed to agitate the slurry within the tank. The agitator includes a rotor 5 mounted on a centrally disposed drive shaft 6 extending axially downwardly into the tank and driven by a motor 7. A stator 8 is also provided around the rotor.

Axially spaced top and bottom hollow froth deflection cones 9 and 10 are also provided. The cone sidewalls extend around the drive shaft adjacent the top of the tank and each cone is oriented such that its smallest diameter is located at its lowermost end nearest the rotor 5. The top cone 9 is truncated and includes an opening 11 at its lowermost end. However, the lowermost end 12 of the bottom cone fits relatively closely around the drive shaft 6, substantially to prohibit slurry flow through this region.

The top cone is fixed with respect to the tank and the lower cone 10 is axially movable along the drive shaft 6 to allow the area of an annular opening 12 between the partially nested cones to be adjusted. In use, the lower cone 10 is moved toward the rotor 5 to increase the area of the opening or away from the rotor to reduce the area of the opening 12.

The flotation device further includes an aeration system including an air blower and a fluid conduit (not shown) to direct air from the blower into the agitator. The conduit is defined in part by an axial bore (not shown) extending through the drive shaft 6 of the rotor.

Feed slurry is introduced into the tank 1 through a feed inlet 13 formed in the sidewall of the tank. A bottom outlet 14 is formed in the lower portion of the tank sidewall 3 to allow removal of relatively coarse or dense components of the slurry. A side outlet 15 is provided to remove slurry containing a relatively high proportion of the gangue slimes for separate downstream treatment. The side outlet includes a fluid conduit 16 connected to the top cone 9. The conduit passes through a slot (not shown) in the sidewall of the bottom cone. A flexible seal (not shown) is provided around the conduit 16 to seal the slot. The conduit is located in the top third of the tank and is adapted to remove slurry from within the top deflection cone 9. The side outlet also includes a valve (not shown) to control flow of fluid from the top cone. The valve can be a pinch valve, or may be a weir type arrangement, or any other suitable alternative.

As will be appreciated by those skilled in the art, particle size distribution varies within the tank based on the initial composition of the slurry, and relevant system parameters such as tank geometry, aeration rate and the normal operating speed of the agitator. Moreover, it is known that the gangue slimes present in the slurry do not float,



despite the fact that they absorb a significant amount of the flotation reagents added to the slurry to facilitate recovery of the valuable mineral particles. Accordingly, the size and location of the opening 12 between the deflection cones is adjusted on the basis of these parameters and the flotation kinetics of the gangue slimes to correspond with a position within the tank having a relatively high concentration of gangue slimes. This position is above a mixing zone of the rotor and below a froth zone near the top of the tank. Adjusting the area of the opening controls the fluid velocity through the opening, and hence the size range of particles entering the bottom cone 10. In this way, the system can be optimised to remove a majority of the gangue slimes through the side outlet without loss of valuable minerals.

Turning now to describe the operation of the flotation device in more detail, slurry is initially fed into the tank via feed inlet 13, from where it migrates generally downwardly toward the agitation and aeration assemblies positioned near the bottom of the tank. The action of the rotor 5 induces a primary flow through the slurry as indicated by arrows F1. The primary flow continuously recirculates the slurry at the bottom of the tank to maintain the particles in suspension. The aeration system continuously disperses air into the rotor 5 to form fine bubbles which collide with and adhere to the valuable mineral particles in the slurry and subsequently float to the top of the tank to form a mineral enriched surface froth. As the froth floats toward the surface, it is directed radially outwardly by the deflection cones for recovery through the overflow launder 4. The rotor also induces a secondary flow through the slurry as indicated by arrows F2.

As targeted finer particles move in the direction indicated by arrows F2, they are drawn into the opening 12 between the deflection cones. From there, they pass downwardly through the bottom cone 10, up through the opening 11 in the top cone, through conduit 16 and out through the side outlet 15. The fine particles are processed downstream separately from the outflow from the bottom outlet 14.

Any gangue particles remaining suspended in the slurry, along with those mineral particles that were not removed by flotation, are continuously discharged from the tank through the bottom outlet 14. From there, the coarse particles are directed initially into a second tank that is substantially identical to the first tank.

In the embodiment illustrated in Figure 2, this second tank includes a base 2 located at a lower level than the base of the first tank such that slurry feeds into the second tank under gravity. From the second tank, the slurry flows under gravity into a

plurality of substantially similar downstream tanks, each connected in series. Respective dart valves 17 control flow of slurry between adjacent tanks.

5 In the embodiment illustrated in Figure 3, the second tank is located at the same level, such that the first and second tanks define a first tank pair. From the second tank, the slurry flows under the influence of gravity into a plurality of downstream tank pairs, each substantially identical to the first pair. Flow of slurry between the tank pairs is controlled by respective dart valves 17, which are opened periodically. As shown in Figure 3, the base of each subsequent tank pair is lower than that of the adjacent upstream tank pair.

10 It will be appreciated that in alternative embodiments, the tanks may be disposed at the same level and the slurry may be pumped between the tanks. Also, in some situations, it may be preferable to include side outlets on only some of the downstream tanks. It will also be appreciated that hybrid and other network combinations, including tanks connected in series, parallel or a combination of both, may be employed, as  
15 required. It will further be understood that different valve types, and different forms of conduit between the tanks, may alternatively be used. In still further embodiments, the aeration system may supply air to the rotor through a pipe with a discharge point located underneath the rotor. In yet another embodiment, such as that illustrated in Figure 3, the deflection cones are omitted and the conduit 16 extends from the side outlet 15 to  
20 terminate at a position in the top third of the tank, near the drive shaft 6.


In the illustrated embodiments, it will be appreciated that the outflow slurry from each tank has a higher proportion of coarser particles than was present in the inflow slurry from the upstream tanks, since some of the finer particles are removed through the side outlets 15. Accordingly, the proportion of coarse particles in the slurry increases as  
25 the feed liquid migrates progressively through the network of tanks. Consequently, when a flotation reagent is added to the slurry in the downstream tanks, there is a greater probability of coating some of the larger particles. Therefore, the probability of floating these larger particles increases in the downstream tanks. This in turn increases the overall efficiency of the flotation process.

30 As described above, the flotation device permits a slurry stream containing both fine and coarse particles to be separated progressively into two parallel branches, with one branch containing the relatively coarse particles from the stream and the other branch containing the finer particles. In this way, the two branches can be individually


optimised for the treatment of either coarse or fine particles, which optimises the efficiency and cost effectiveness of the overall separation process. It will therefore be appreciated that the invention provides both practical and commercially significant advantages over the prior art.

- 5        Although the invention has been described with reference to specific examples, it will be appreciated by those skilled in the art that the invention may be embodied in many other forms.


DATED this 17th Day of March, 2003  
BALDWIN SHELSTON WATERS  
10 Attorneys for: OUTOKUMPU OYJ

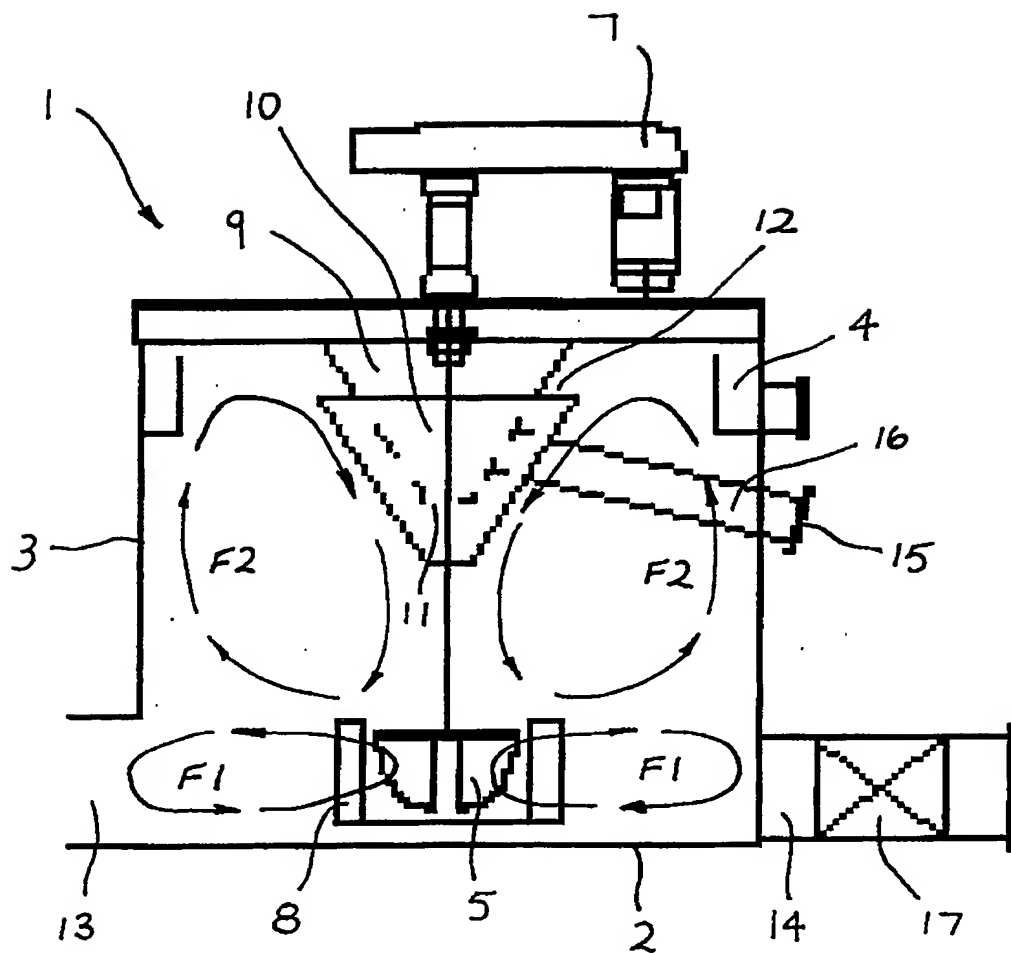

**FIG. 1**

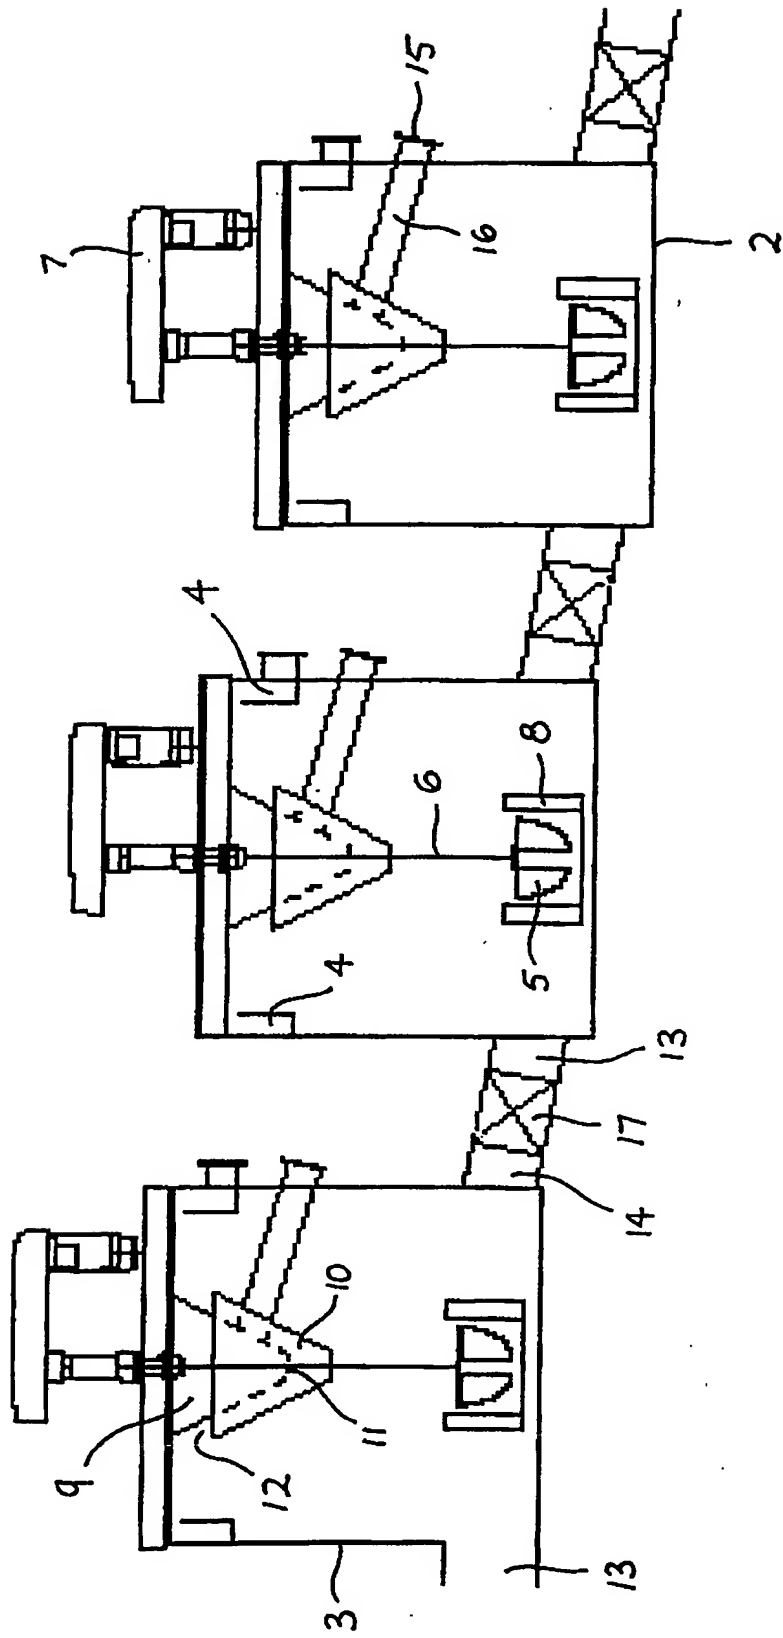

**FIG. 2**

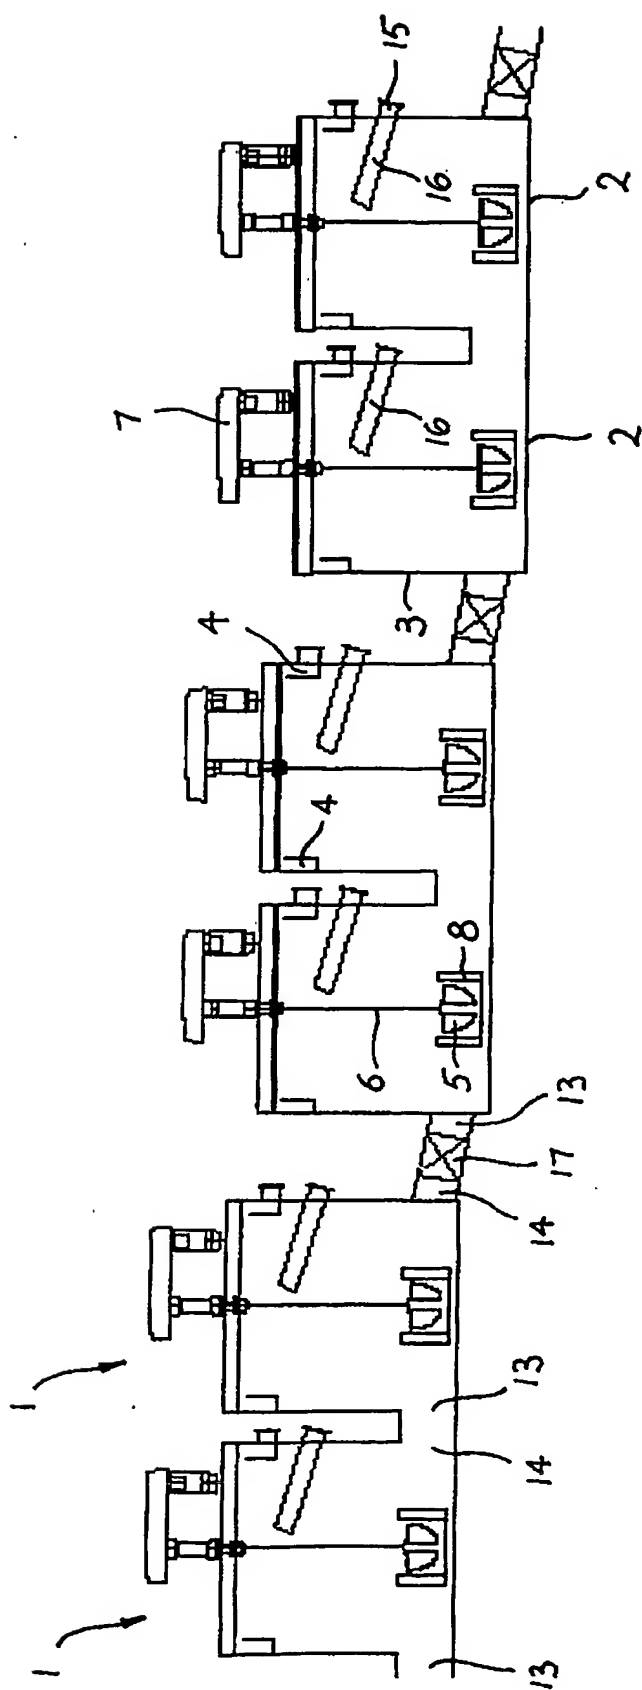

**FIG. 3**